




Multimode Pigtailed

Techlogiks Multi Mode fiber pigtailed are available in a variety of cable colors to complement any network, custom configurations and performances. Full choice of available connector types like LC/SC/ST/FC/E2000/MTRJ etc

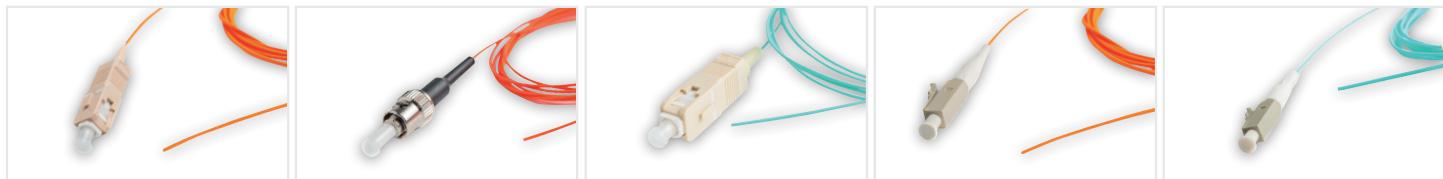

Applications

- 100% optically tested in factory
- Tight or semi-tight buffered 900um cable available
- Visual inspection of endface by 400x microscope.
- Low insertion loss and back reflection.

Specifications	
Connector Type	SC,ST,FC,LC,MTRJ,MU
Fiber Type	OM1 (62.5/125), OM2 (50/125), OM3, OM4
Insertion Loss (Against Ref) IEC 61300-3-4	< 0.30 dB
Durability IEC 61300-2-2	< 0.20 dB (500 cycles)
Operating Temperature	-20°C to +70°C

ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
TL-FPT-SC-62-1.5	SC Multi Mode 62.5/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-LC-62-1.5	LC Multi Mode 62.5/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-SC-50-1.5	SC Multi Mode 50/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-LC-50-1.5	LC Multi Mode 50/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-SC-OM3-1.5	SC Multi Mode OM3 50/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-LC-OM3-1.5	LC Multi Mode OM3 50/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-SC-OM4-1.5	SC Multi Mode OM4 50/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-LC-OM4-1.5	LC Multi Mode OM4 50/125μ Fiber Optic Pigtail 1.5 Meter
TL-FPT-XX-YY-ZZZ	
XX –LC, SC, ST, FC, MTRJ.... YY – 62, 50, OM3, OM4. ZZZ-001, 002, 003 Meters etc....	