


Multi-Mode OM4 Tight Jacketed Fiber Optic Cable –2F, 4F, 6F, 8F, 12F, 24F Cables

Techlogiks offers the most complete solution for the Indoor application. The tight buffered cables are designed perfectly for inter-equipment connections. These cables have high strength and good banding performance. Nylon/PVC tight buffered fibres upto 900 microns surrounded with strength member Aramid Yarn and overall jacketed with LSZH.

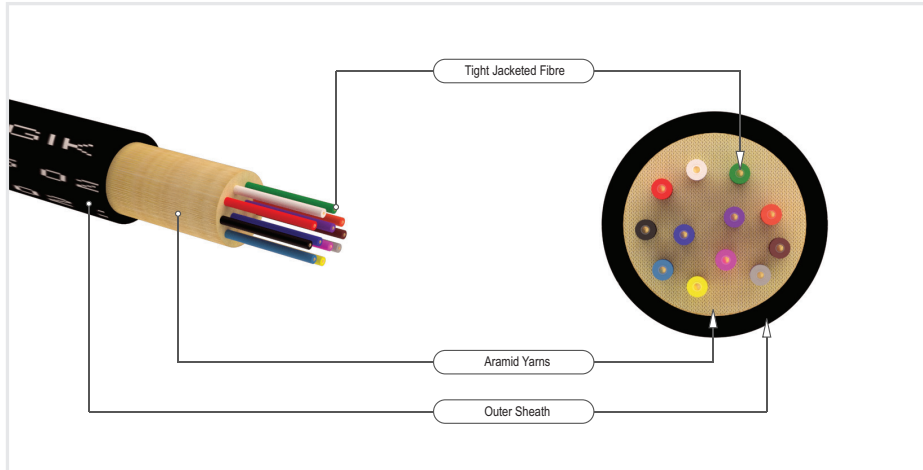

Standards Compliance :

Telecordia GR-20, IEC 60794, EIA/TIA, ITU-T, EN187000, RUS1755.900

Applications :

Indoor, Ducts/Conduits, Local loop, Broadband network

Advantages:

Good bending performance, High tensile strength, tight structure, light weight, Small Dimension, Facilitates flexible installations

TIGHT JACKETED FIBER CABLE

Cable Construction Details

Parameter	Dimensions	Type, Color													
Number of tight jacketed Fibers	24	Color	Bl	Or	Gr	Br	Sl	Wh	Rd	Bk	Yi	Vi	Pi	Ag	
			Bl*	Or*	Gr*	Br*	Sl*	Wh*	Rd*	Bk*	Yj*	Vj*	Pj*	Ag*	
	12	Color	Bl	Or	Gr	Br	Sl	Wh	Rd	Bk	Yi	Vi	Pi	Ag	
			Bl	Or	Gr	Br	Sl	Wh	Rd	Bk					
			Bl	Or	Gr	Br	Sl	Wh							
			Bl	Or	Gr	Br									
8	Color	Bl	Or												
		Bl	Or												
6	Color	Bl	Or												
		Bl	Or												
4	Color	Bl	Or												
		Bl	Or												
2	Color	Bl	Or												
		Bl	Or												
Tight Jacketing over Fiber	850 ± 50 µm	LSZH													
Peripheral Strength Member	---	Aramid Yarn													
Outer Sheath	0.9 mm (Nominal)	LSZH - Black													
			24F	12F	8F	6F	4F	2F							
Overall Cable Diameter	8.5 ± 0.3 mm	6.8 ± 0.5 mm	6.5 ± 0.3 mm	6.0 ± 0.3 mm	5.4 ± 0.3 mm	4.5 ± 0.5 mm									
Cable Weight	60.0 kg (Nom)	45.0 kg (Nom)	35.0 kg (Nom)	30.0 kg (Nom)	25.0 kg (Nom)	20.0 kg (Nom)									

* Longitudinal stripe making on the next 12 colors

Optical Fibre Characteristics		
Fibre Type		50 µm (OM4)
Attenuation	at 850 nm	≤ 3.0 dB/km
	at 1300 nm	≤ 1.0 dB/km
Bandwidth	850 nm	≥ 3500 MHz.km
	1300 nm	≥ 500 MHz.km
Core Diameter		50 ± 2.5 µm
Core Cladding Concentricity Error		≤ 1 µm
Cladding Diameter		125 ± 1 µm
Cladding Non-circularity		≤ 1 %
Coating Diameter		250 ± 15 µm

Cable Mechanical Characteristics						
Cable Type	24F	12F	8F	6F	4F	2F
Tensile Strength	1000 N	800 N	600 N	600 N	600 N	600 N
Crush Resistance	500 N	500 N	500 N	500 N	500 N	500 N
Impact Resistance	5 Nm	5 Nm	5 N.m	5 N.m	5 N.m	5 N.m
Minimum Bend Radius	20 x D	20 x D	10 x D	10 x D	10 x D	10 x D

Temperature Performance	
Installation	-20 °C to + 70 °C
Operation	-20 °C to + 70 °C
Storage	-20 °C to + 70 °C

ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
TL-02F-OM4-TB	2 Fiber MM OM4 50/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-04F-OM4-TB	4 Fiber MM OM4 50/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-06F-OM4-TB	6 Fiber MM OM4 50/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-08F-OM4-TB	8 Fiber MM OM4 50/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-12F-OM4-TB	12 Fiber MM OM4 50/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH
TL-24F-OM4-TB	24 Fiber MM OM4 50/125µ Tight Buffered Aramid Yarn Indoor FOC LSZH